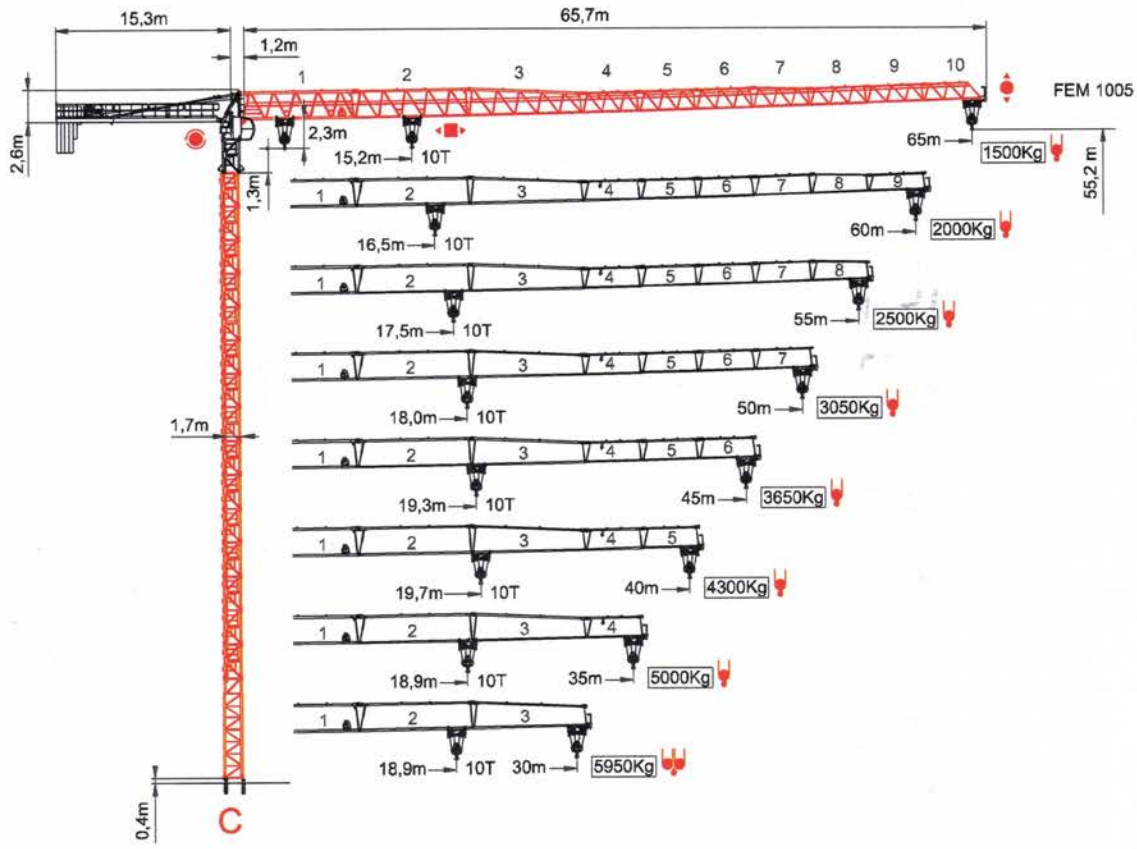
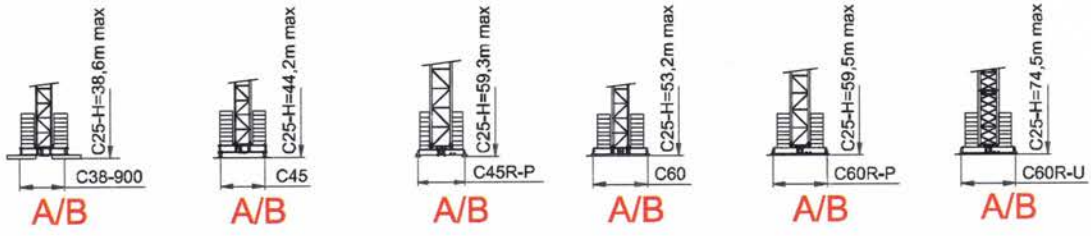

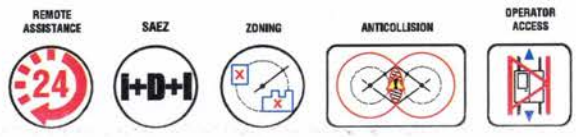
STC 6515 10T B









ISO 9001

EN 14439 - FEM 1005 C25

STC 6515 10T B

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

65,0 m

20,0	22,5	25,0	26,8	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	57,5	60,0	62,5	65,0	m
5000	5000	5000	5000	4360	3940	3590	3290	3020	2790	2580	2400	2230	2080	1950	1820	1700	1600	1500	Kg
15,2	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	57,5	60,0	62,5	65,0	m
10000	6100	5380	4780	4290	3870	3520	3220	2950	2720	2510	2330	2160	2010	1880	1750	1630	1530	1430	Kg

60,0 m

20,0	22,5	25,0	27,5	29,8	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	57,5	60,0	m
5000	5000	5000	5000	5000	4520	4200	3780	3500	3230	2990	2780	2590	2430	2280	2140	2000	Kg
16,5	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	57,5	60,0	m
10000	6920	6110	5450	4910	4470	4030	3710	3410	3150	2920	2710	2520	2360	2210	2070	1930	Kg

55,0 m

20,0	22,5	25,0	27,5	30,0	32,0	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	m
5000	5000	5000	5000	5000	5000	4500	4130	3810	3530	3280	3060	2860	2680	2500	Kg
17,5	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	55,0	m
10000	7530	6650	5930	5350	4850	4430	4070	3740	3460	3210	2900	2790	2610	2430	Kg

50,0 m

20,0	22,5	25,0	27,5	30,0	33,0	35,0	37,5	40,0	42,5	45,0	47,5	50,0	m
5000	5000	5000	5000	5000	5000	4660	4300	3990	3710	3470	3250	3050	Kg
18,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	m
10000	7820	6990	6270	5550	5070	4590	4230	3920	3640	3400	3180	2880	Kg

45,0 m

20,0	22,5	25,0	27,5	30,0	32,5	34,8	37,5	40,0	42,5	45,0	m
5000	5000	5000	5000	5000	5000	5000	4550	4230	3920	3650	Kg
19,3	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	m
10000	8250	7300	6550	5880	5350	4910	4480	4160	3850	3580	Kg

40,0 m

20,0	22,5	25,0	27,5	30,0	32,5	35,2	37,5	40,0	m
5000	5000	5000	5000	5000	5000	5000	4630	4300	Kg
19,7	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	m
10000	8350	7400	6630	5990	5450	4950	4560	4230	Kg

35,0 m

20,0	22,5	25,0	27,5	30,0	32,5	35,0	m
5000	5000	5000	5000	5000	5000	5000	Kg
18,9	22,5	25,0	27,5	30,0	32,5	35,0	m
10000	8270	7320	6550	5920	5380	4930	Kg

30,0 m

20,0	22,5	25,0	27,5	30,0	m
5000	5000	5000	4000	4000	Kg
18,9	22,5	25,0	27,5	30,0	m
10000	8270	7350	6570	5950	Kg

STC 6515 10T B

Bloque de contrapeso - Counterweight blocks - Gegengewichtsblöcke - Bloc de contrepoid - Blocco di contrappeso - Плиты противовеса

	65/60 m			55 m			50 m			45 m		
	A	B	C	A	B	C	A	B	C	A	B	C
	8	-	-	8	-	-	7	1	-	7	-	-
	22000 Kg			22000 Kg			20750 Kg			19250 Kg		

	40 m			35 m			30 m		
	A	B	C	A	B	C	A	B	C
	6	1	-	6	-	-	5	-	-
	18000 Kg			16500 Kg			13750 Kg		

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

25Hp (18,5 Kw) INV
400V / 50HZ
HBG 3 layers 110m S/R Ø10mm

		m/min	0– 35	0– 40	0– 58	0– 84	0– 17,5	0– 20	0– 30	0– 42
	220 m	Kg	2500	2250	1500	600	5000	4500	3000	1200
		Kw	18,5	18,5	18,5	18,5	18,5	18,5	18,5	18,5

	m/min	0 - 53
	Kw	5,5
	r.p.m.	0,8
	Kw	2 x 5,5
	m/min	12 / 24
	Kw	4 x 3


45Hp (33Kw) - INV

2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 92A Fuse= 125A	TOTAL POWER 54 KVA	GENERATOR 100 KVA	100m 4x35mm2	150m 4x50mm2	200m 4x50mm2
		* 480V 60Hz Imax.= 77A Fuse= 90A					

* Opcional / Optional / Opzionale
Elevación / Hoisting / Heben / Levage / Sollevamento
Distribución / Trolleying / Katzfahren / Distribution / Ditribuzione
Orientación / Slewing / Schwenken / Orientation / Rotazione
Traslacion / Travelling / Schienenfahren / Translation / Traslazione
Cable / Rope / Seil / Câble / Fune

STC 6515 10T B

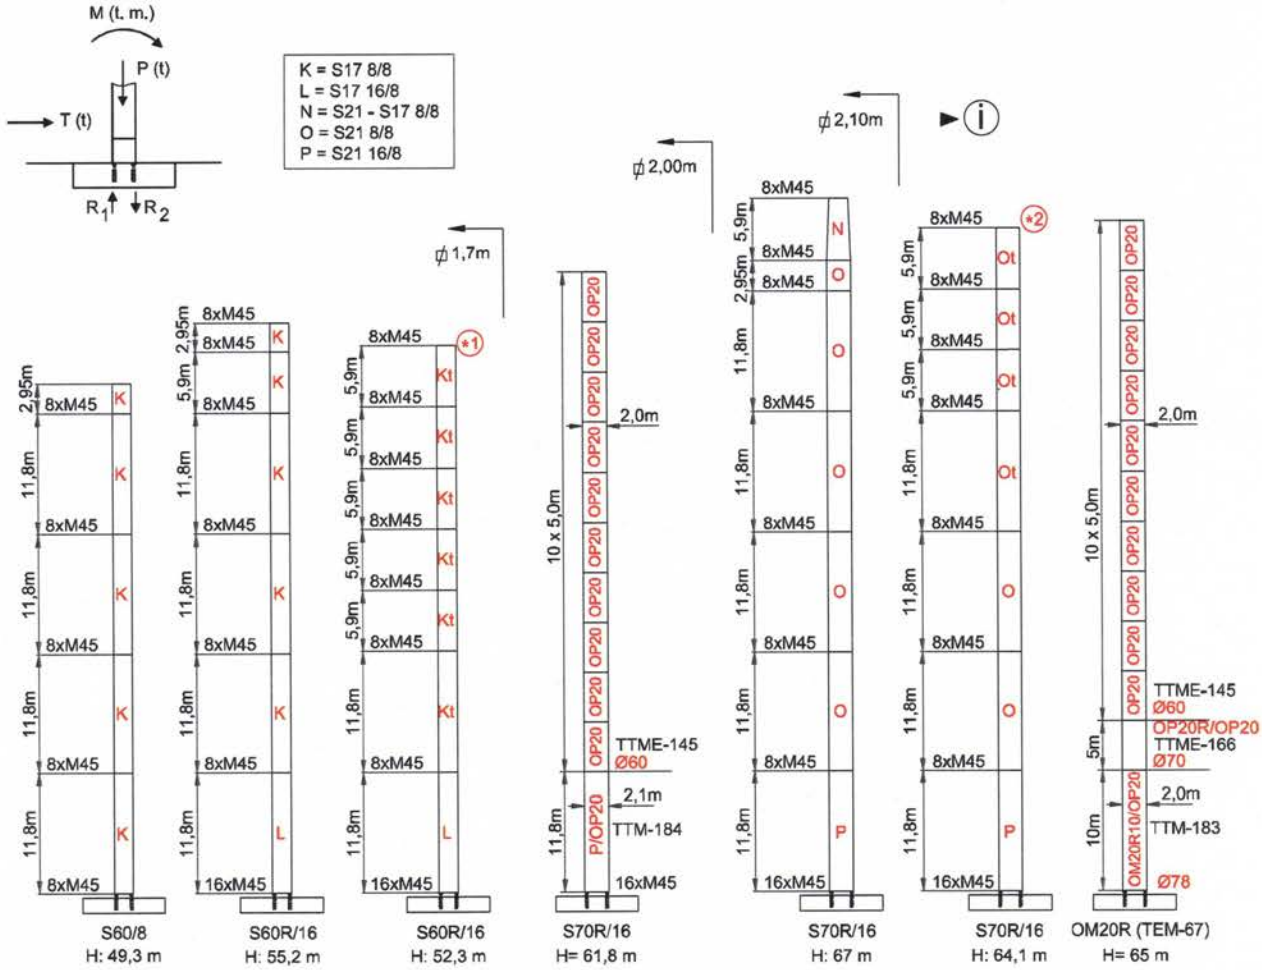FEM 1005 - Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни




C25	H (m)	22,9	28,8	34,7	46,5	49,5	52,4	58,3	64,2
	M (T·m)	245,6	282,2	325,6	436,6	462,5	498	591	693,2
	T (t)	4,7	5,4	6	7,3	7,6	7,9	14	15
	P (t)	55,6	58,3	60,9	66,2	68,6	70	75,8	78

C50	H (m)	22,9	28,8	34,7	43,5	49,5	52,4	55,1	58,1
	M (T·m)	245,6	282,2	325,6	405,4	500,4	564,9	600,2	668
	T (t)	4,74	5,4	6	7	13,4	14	14,9	15,3
	P (t)	55,6	58,2	60,9	64,8	70,2	71,4	74,5	75,7


D50	H (m)	22,9	28,8	36,9	34,7	46,5		49,2	
	M (T·m)	245,6	282,2	345,7	402,4	595,6		847,1	
	T (t)	4,7	5,3	13,3	14,2	16,7		17,8	
	P (t)	55,6	58,2	63,2	64,4	69		72,2	

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу


FEM 1005 - Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы




									A/B
C25	H (m)	23,7 m	26,4 m	29,4 m	32,3 m	35,3 m	38,2 m	41,2 m	44,2 m
	R1 (t)	66,9 t	70,5 t	74,6t	79 t	83,7 t	89 t	100 t	114,3 t
	Z (t)	60 t	60 t	60 t	60 t	70 t	80 t	80 t	90 t
								A/B	
C50	H (m)	23,7 m	26,4 m	29,4 m	32,3 m	35,3 m	38,2 m	41,2 m	
	R1 (t)	70,2 t	70,8 t	74,9t	79,8 t	83,9 t	97,4 t	113,1 t	
	Z (t)	60 t	60 t	70 t	80 t	90 t	100 t	110 t	
							A/B		
D50	H (m)	23,7 m	26,4 m	29,4 m	32,3 m	35,3 m	38,2 m		
	R1 (t)	70,4 t	70,9 t	81,8 t	97,5 t	114,6 t	133 t		
	Z (t)	60 t	60 t	70 t	80 t	90 t	100 t		




						A/B			B
C25	H (m)	26,8 m	32,7 m	38,6 m	44,5 m	47,5 m	50,4 m	56,3 m	59,3 m
	R1 (t)	71,5 t	75,1 t	84,5t	111,7 t	126,9 t	143,5 t	180,6 t	201,6 t
	Z (t)	60 t	60 t	70 t	90 t	100 t	120 t	160 t	180 t
					A/B			B	
C50	H (m)	26,8 m	32,7 m	38,6 m	44,5 m	47,5 m	50,4 m	56,3 m	
	R1 (t)	71,5 t	74,6 t	96,7t	127,1 t	144,2 t	162,6 t	204,3 t	
	Z (t)	60 t	60 t	70 t	100 t	120 t	140 t	190 t	
		A/B					B		
D50	H (m)	26,8 m	32,7 m	38,6 m	44,5 m	47,5 m	50,4 m		
	R1 (t)	82,9 t	98 t	132,1 t	171,9 t	194,3 t	218,5 t		
	Z (t)	60 t	70 t	110 t	160 t	190 t	220 t		




							A/B		B
C25	H (m)	27 m	32,9 m	35,8 m	38,8 m	44,7 m	50,6 m	56,5 m	59,5 m
	R1 (t)	41,5 t	49,2 t	53,6t	61,8 t	81,3 t	103,7 t	129,6 t	144,2 t
	Z (t)	48 t	48 t	48 t	64 t	64 t	80 t	96 t	128 t
							A/B	B	
C50	H (m)	27 m	32,9 m	35,8 m	38,8 m	44,7 m	50,6 m	56,5 m	
	R1 (t)	48,6 t	53,1 t	61,4t	71,2 t	93 t	118,2 t	147,3 t	
	Z (t)	48 t	48 t	48 t	64 t	64 t	96 t	128 t	
						A/B	B		
D50	H (m)	27 m	32,9 m	35,8 m	38,8 m	44,7 m	50,6 m		
	R1 (t)	70,4 t	72,6 t	84,3 t	97,2 t	125,7 t	158,7 t		
	Z (t)	48 t	48 t	64 t	80 t	112 t	144 t		



		A/B							B
C25	H (m)	53,8 m	56,8 m	59,7 m	62,7 m	65,6 m	68,6 m	71,5 m	74,5 m
	R1 (t)	119,6 t	132,2t	145,5 t	159,7 t	174,9 t	191,2 t	208,5 t	227,2 t
	Z (t)	96 t	112 t	128 t	144 t	160 t	176 t	192 t	208 t
							B		
C50	H (m)	53,8 m	56,8 m	59,7 m	62,7 m	65,6 m	68,6 m		
	R1 (t)	135,3 t	149,3t	164,3 t	180,2 t	197,2 t	215,4 t		
	Z (t)	112 t	128 t	144 t	160 t	192 t	208 t		
					B				
D50	H (m)	53,8 m	56,8 m	59,7 m	62,7 m				
	R1 (t)	180,9 t	199,3 t	218,8 t	239,7 t				
	Z (t)	176 t	192 t	224 t	240 t				




								A/B	
C25	H (m)	23,7 m	26,6 m	29,6 m	35,5 m	38,4 m	44,3 m	52,2 m	53,2 m
	R1 (t)	49 t	53,1 t	56,4 t	59,9 t	62,4 t	82,2 t	105,5 t	118,5 t
	Z (t)	48 t	48 t	48 t	48 t	64 t	80 t	80 t	112 t
							A/B		
C50	H (m)	23,7 m	26,6 m	29,6 m	35,5 m	38,4 m	44,3 m	52,2 m	
	R1 (t)	51,3 t	54,8 t	58 t	61,2 t	71,2 t	93,6 t	119,6 t	
	Z (t)	48 t	48 t	48 t	64 t	64 t	80 t	96 t	
						A/B			
D50	H (m)	23,7 m	26,6 m	29,6 m	35,5 m	38,4 m	44,3 m		
	R1 (t)	52 t	56 t	61,7 t	84,9 t	97,9 t	127,3 t		
	Z (t)	48 t	48 t	48 t	64 t	80 t	96 t		



							A/B
C25	H (m)	23,8 m	26,8 m	29,7 m	32,7 m	35,6 m	38,6 m
	R1 (t)	80,5 t	85 t	88,9 t	95,4 t	101,3 t	107,7 t
	Z (t)	70 t	70 t	80 t	90 t	100 t	100 t
							A/B
C50	H (m)	23,8 m	26,8 m	29,7 m	32,7 m	35,6 m	38,6 m
	R1 (t)	81,2 t	86,4 t	89,9 t	96,8 t	102 t	119,9 t
	Z (t)	70 t	70 t	80 t	90 t	100 t	120 t
					A/B	B	
D50	H (m)	23,8 m	26,8 m	29,7 m	32,7 m	35,6 m	
	R1 (t)	81,8 t	86,8 t	100,5 t	119,5 t	140,4 t	
	Z (t)	70 t	70 t	80 t	100 t	110 t	

STC 6515 10T B


(A/B)



C45-OM

						A/B		
C25	H (m)	25,7 m	30,7 m	35,7 m	40,7 m	45,7 m		
	R1 (t)	67 t	82 t	92 t	111 t	120 t		
	Z (t)	66 t	66 t	77 t	90 t	100 t		
C50	H (m)	25,7 m	30,7 m	35,7 m	40,7 m			
	R1 (t)	76 t	83 t	93t	103 t			
	Z (t)	66 t	80 t	110 t	130 t			
D50	H (m)	25,7 m	30,7 m	35,7 m	40,7 m			
	R1 (t)	76 t	83 t	119 t	133 t			
	Z (t)	66 t	80 t	110 t	130 t			


(A/B)



C60-OM

C25	H (m)	25,7 m	30,7 m	35,7 m	40,7 m	45,7 m	50,7 m	
	R1 (t)	53 t	60 t	62 t	68 t	96 t	107 t	
	Z (t)	48 t	50 t	50 t	80 t	90 t	100 t	
C50	H (m)	25,7 m	30,7 m	35,7 m	40,7 m	45,7 m	50,7 m	
	R1 (t)	57 t	60 t	62 t	78 t	102 t	115 t	
	Z (t)	48 t	50 t	64 t	80 t	90 t	110 t	
D50	H (m)	25,7 m	30,7 m	35,7 m	40,7 m	45,7 m		
	R1 (t)	58 t	62 t	85 t	99 t	135 t		
	Z (t)	48 t	48 t	64 t	90 t	110 t		

(A/B)





C60R/OM


C25	H (m)	26 m	31 m	36 m	41 m	46 m	51 m	56 m	61 m
	R1 (t)	42 t	48 t	54 t	66 t	83 t	106 t	129 t	147 t
	Z (t)	48 t	48 t	48 t	74 t	78 t	90 t	96 t	135 t
C50	H (m)	26 m	31 m	36 m	41 m	46 m	51 m	56 m	
	R1 (t)	48,6 t	54 t	63 t	82 t	93 t	124 t	148 t	
	Z (t)	48 t	48 t	48 t	68 t	68 t	100 t	135 t	
D50	H (m)	26 m	31 m	36 m	41 m	46 m	51 m		
	R1 (t)	70,4 t	73 t	86 t	110 t	135 t	170 t		
	Z (t)	48 t	48 t	64 t	86 t	120 t	160 t		

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

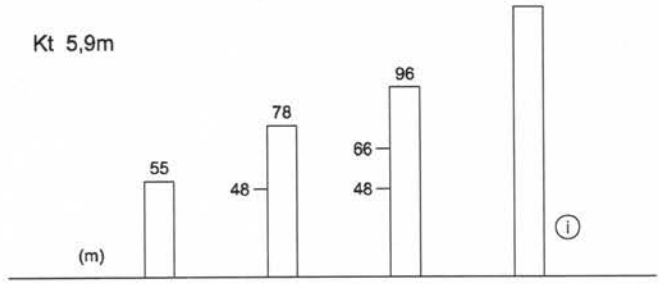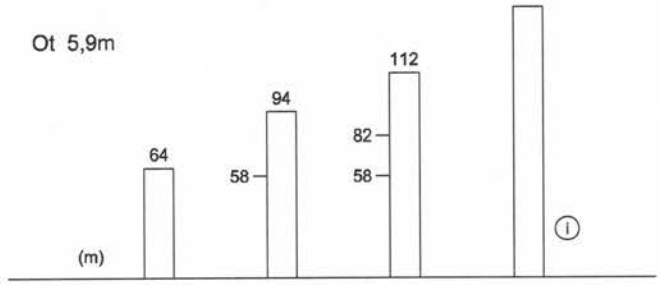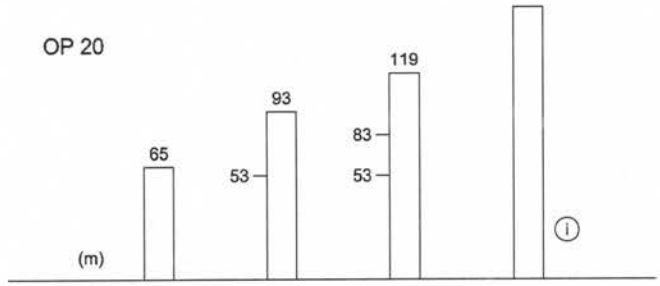TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANDRÉE / GRU ANCORATA








ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подьема и наращивание крана по запросу

STC 6515 10T B

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES / GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ





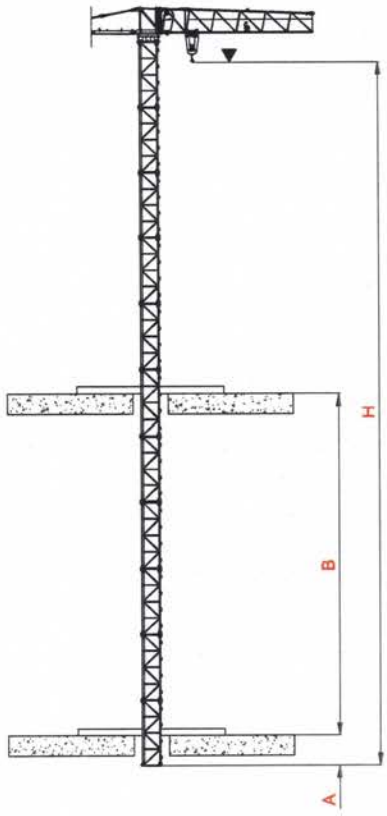
OP20 ⓘ



ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу






Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

UPPER PART STC 65 15 B



CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
G65E-01	Counterjib 1		11,94	1,25	0,7	930
	Counterjib 2		2,95	1,25	0,7	3340
	Jib Trolley		1,90	1,91	1,10	353
	Hoist Block		1,10	0,4	1,40	414
	Support cabin		2,55	1,7	2,23	293
	Jib 1		10,41	1,21	2,39	2401
	Jib 2		10,3	1,21	2,37	1704
	Jib 3		10,3	1,21	2,35	1191
	Jib end		0,61	1,45	1,5	100
	Slewing unit		2,5	2,5	2,5	4200
			2,12	1,41	2,14	1200
EQE652-01 Electrical Box Incl.	Hoist winch 45 HP INV		1,80	2,2	1,2	950
EQEE6515-01 Electrical Box Excl.	Hoist winch 60 HP INV		1,91	2,2	1,2	1830
AGT-175	Electrical Box 37/45		2,30	1,6	1,8	730
AGT-09 AGT-08 AGT-180	Cabin DELUXE Cabin STANDARD Cabin Support		3,30 3,30	1,8 1,8	2,4 2,4	1030 1230

STC 6515 10T B

UPPER PART STC 65 15 B



CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
P65E-36	Jib 35m					6438 Kg
P65E-37	Jib 40m					6912 Kg
P65E-38	Jib 45m					7331 Kg
P65E-39	Jib 50m					7663 Kg
P65E-42	Jib 55m					7974 Kg
P65E-40	Jib 60m					8276 Kg
P65E-41	Jib 65m					8564 Kg
	Jib 4		5,20	1,21	1,73	559 Kg
	Jib 5		5,20	1,21	1,70	474 Kg
	Jib 6		5,20	1,21	1,69	419 Kg
	Jib 7		5,18	1,21	1,68	332 Kg
	Jib 8		5,15	1,21	1,44	300 Kg
	Jib 9		5,15	1,21	1,43	280 Kg
	Jib 10		5,15	1,21	1,43	247 Kg
	Counterweight blocks	Ⓐ 	3,5	1,25	0,29	2750 Kg
	Counterweight blocks	Ⓑ 	1,83	1,25	0,29	1500 Kg

FOUNDATION ANCHOR






CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TEM-03	S60/8	 H L x W	1,85	1,85	1,6	956
TEM-04	S60R/16	 H L x W	1,85	1,85	1,6	1108
TEM-05	S70/8	 H L x W	2,27	2,27	1,6	1122
TEM-06	S70R/16	 H L x W	2,27	2,27	1,6	1274
TEM-13	S60/8	 L x W H	0,35	0,35	1,6	239 (x4)
TEM-14	S60R/16	 L x W H	0,35	0,35	1,6	277 (x4)
TEM-15	S70/8	 L x W H	0,35	0,35	1,6	280,5 (x4)
TEM-16	S70R/16	 L x W H	0,35	0,35	1,6	318,5 (x4)
TEM-61	OP20 2 x Ø60	 W L	0,65	0,65	2,0	1960 (x4)
TEM-60	OP20R 2 x Ø70	 W L	0,65	0,65	2,0	2210 (x4)
TEM-67	OM20R 2 x Ø78	 W L	0,65	0,65	2,4	2830 (x4)
TEM-23	DIMA Type O	 H L x W	2,31	2,34	0,8	1650
TEM-20	DIMA Type T / U / Z	 H L x W	2,60	2,60	1,0	2500
TEM-64	DIMA OP20 8 x Ø60	 H W	2,1	2,0	0,8	1200
TEM-65	DIMA OP20R 8 x Ø70	 H W	2,0	2,0	0,8	1300

STC 6515 10T B

TOWER SECTION


CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TTM-14	Type K (S17)		11,8	1,85	1,85	4620
TTM-15	Type K (S17)		5,9	1,85	1,85	2505
TTM-17	Type L (S17)		11,8	1,85	1,85	5325
TTM-18	Type M (S17)		11,8	1,85	1,85	5670
TTM-19	Type N (S17/S21)		5,9			2850
TTM-20	Type O (S21)		11,8	2,27	2,27	4980
TTM-21	Type O (S21)		5,9	2,27	2,27	2680
TTM-23	Type P (S21)		11,8	2,27	2,27	5880
TTM-24	Type Q (S21)		11,8	2,27	2,27	5900
TTM-184	P/OP20		11,8	2,3	2,1	5890
TTME-145	OP20 Ø60		5,21	2,05	2,0	3000
TTM-147	OP20R Ø70		5,35	2,1	2,0	3500
TTM-166	OP20R/OP20		5,21	2,1	2,0	3500
TTM-183	OM20R10/OP20		10,21	2,1	2,0	5860

CROSSBASES







CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BA0-15	C38-900		5,75	1,47	0,97	5550
BA0-03	C45-700 C45-OM		6,7 6,7	1,3 1,3	0,77 1,3	6190 6495
BA0-09 BA0-09	C45R-P C45R-OM		6,9 6,9	1,94 1,94	1,14 1,30	9000 9100
BA0-05	C60-900 C60-OM		8,66 8,66	1,47 1,47	0,96 1,50	8625 8925
BA0-10 BA0-17	C60R-P C60R-U C60R-OM		9,01 9,01 9,01	1,94 1,94 1,94	1,35 1,35 1,50	13500 13500 13600
LB0-07	Base counterweight		4,5	0,51	0,9	5000
LB0-06	Base counterweight		5,8	0,4	1,5	8000
LB0-08	Base support block		2	0,5	2	5000
BAN-01	Levellers (C38/C45)		1,20	1,20	0,65	290 (x4)
BAN-03	Levellers (C60-900)		1,20	1,20	0,65	230 (x4)
BAN-05	Levellers (C45R/C60R)		1,20	1,20	0,65	250 (x4)
BAN-04	Pyramids (C38/C45)		0,5	0,5	0,4	80 (x4)

STC 6515 10T B

TRAVELLING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BAB-02	Bogies translation S2MR35		1,15	0,25	0,45	1700
			Models: TL50 / TL55 / TLS6014			
BAB-01	Bogies translation S2MR40		1,15	0,25	0,45	1800
			Models: TLS6515 / TLS65B10T / TLS6510TSR / TLS7514T / SLH70.4 / SLH80 / SLH110			
BAB-09	Bogies translation S4MR40		1,15	1,25	0,45	1960
			Models: TLS6014 / TLS6515 / TLS65B10T / TLS6510TSR / SLH70.4 / SLH80 / SLH110			
BAB-05	Bogies translation D4MR40		2,94	1,25	0,97	13600
			Models: TLS7514T / TLS75B18T / TLS8020T / TLS8024T / TLS8032T / SLH300 / SL320 / SL450 / SL730			
BAB-11	Bogies translation D4MR60		3,20	1,25	1,20	18600
			Models: TLS800 / TLS1000 / TLS8020T / TLS8024T / TLS8032T / SL450 / SL730			
BAE-05	Electric cable reel D70 (50/1000m)					
BAE-06	Electric cable reel D90 (50/1000m)					
-	Rail		L1= 0,14 L2= 0,07		0,16	54Kg/mt

EXTERNAL CLIMBING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTL-09	Climbing Link Section K		3,00	1,85	1,85	1590
JTL-22	Climbing Link Section O		3,00	2,30	2,30	1670
JTL-23	Climbing Link Section K/OP20		3,00	1,90	2,00	1980
JTL-18	Climbing Link Section O/OP20		3,00	2,10	2,00	2050
JTE-03	Climbing cage Type K-5,9		11,20	2,10	2,10	8000
JTE-15	Climbing cage Type O-5,9		11,20	2,70	2,70	8900
JTE-15	Climbing cage Type OP20		11,00	2,60	2,60	9800
JEH-02 JEH-05 JEH-05	Ex.Hydraulic Sys. K Ex.Hydraulic Sys. O Ex.Hydraulic Sys OP20					1510 1630 1630
JMAE-03	External climbing tie Type K		2,30	2,30	0,26	950
JMAE-04	External climbing tie Type O		2,70	2,70	0,26	1135
JMAE-04	External climbing tie Type OP20		2,80	2,76	0,40	1456

EXTERNAL CLIMBING TOWER SECTION

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTT-02	Climbing tower Type KT-11,8 (S17)		11,8	1,85	1,85	4750
JTT-04	Climbing tower Type KT-5,9 (S17)		5,9	1,85	1,85	2505
JTT-07	Climbing tower Type OT-11,8 (S21)		11,8	2,30	2,30	5200
JTT-12	Climbing tower Type OT-5,9 (S21)		5,9	2,30	2,30	2870

STC 6515 10T B

INTERNAL LADDER CLIMBING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTI-11 *Optional	Internal climbing K Tower section Type A (S17)		2,95	1,70	1,70	4554
JTI-13	Internal climbing K Tower section LT Type A (S17)		11,80	1,70	1,70	5520
JTI-12	Internal climbing K Type B (S17)		2,95	1,70	1,70	4550
JTT-03	Tower section KT (S17)		2,95	1,70	1,70	1600
JEH-14	Internal Hydraulic System (S17)					3950
JMA-15	Internal climbing tie K (S17)	 (X3)	2,4	2,38	0,45	1460
JTL-04	Tower system climbing 163		3,00	2,1	2,1	1640

40' HC x 6 - HBG 36,9 m



x 6 - HBG 36,9 m



ELECTRICAL HOSE & STEEL WIRE ROPE

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
ZZZM-03	+m. extra electrical		1,0			
ZZZC-06	+m. additional HUH hoisting wire Ø12		1,0			

ACCESORIES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
AGT-93	Remote with screen					
AGT-95	Extra heating					
AGT-108	150 Amp slip-ring					
AGT-164	Automatic greasing device					
AGT-24	Zonning 4.0 system AMCS					
AGT-23	Anticolision system GD					
AGT-162	HVAC system 50° 75CV					
ⓘ	Corporate paint					
AGT-17	Push button control 1,5m					
AGT-39	Auxiliary derrick with motor					
AGT-38	Auxiliary derrick w/o motor					
AGT-31	Air conditioner 60Hz					
AGT-30	Air conditioner 50Hz					
AGT-28	Winter kit -20°					